


SC-C4B Connector



TECHNICAL DATA

| | |
|---------------------------|-----------------------|
| Insulation Material | PPO |
| Contact Material | Copper, Tin plated |
| Adapting Current | 30A |
| Rated Voltage | 1000V (TUV) 600V (UL) |
| Test Voltage | 8KV (TUV50HZ,1min) |
| Contact Resistance | <0.5mΩ |
| Degree Of Protection | IP 67 |
| Ambient Temperature Range | -40℃~ +85℃ |
| Flame Class | UL 94-V0 |
| Safety Class | II |
| Pin Dimensions | Ø4mm |

PRODUCT DIMENSIONS

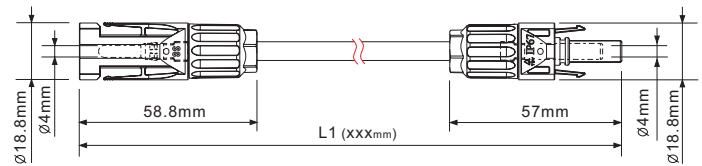

| | |
|-------------------------|--------------------------------------------------|
| Conductor cross section | 14 / 12 / 10 AWG 2.5 / 4.0 / 6.0 mm ² |
|-------------------------|--------------------------------------------------|

MAIN SPECIALITY

- >> All the connection made by double fixed connection
- >> low power loss
- >> With the capacity of anti-aging and resistance to ultraviolet radiation on the outer cover
- >> With convenient installation, strong commonality
- >> To meet the using requirement under bad outdoor condition